

CB 'LIL HUMMER™' Compact Blower Silencer

INLET OR DISCHARGE SILENCER FOR POSITIVE DISPLACEMENT BLOWERS



Benefits ...

Approximately 1/3 the size of conventional blower silencers.

Reduces overall package noise without further acoustic treatment.

Reduces cost, overall package size, weight, storage space, freight cost, and damage.

VERSATILE—Suitable for inlet or discharge application, forward or reverse flow, all without compromising acoustic or pressure drop performance.

Design Advantages ...

For conditions up to 15 PSIG.

Internal pack material suitable for temperatures up to 325 degrees F.

Standard connections, plain nominal pipe ends.

Flanged or threaded connections available.

Availability ...

Sizes 2" through 12" stock.

Larger sizes, special connections, and mounting hardware available for fast delivery.




UNIVERSAL SILENCER

A FLEETGUARD/NELSON COMPANY


Noise Control and Air Filtration

CB 'LIL HUMMER' Compact Blower Silencer

ATTENUATION CURVE, TYPICAL

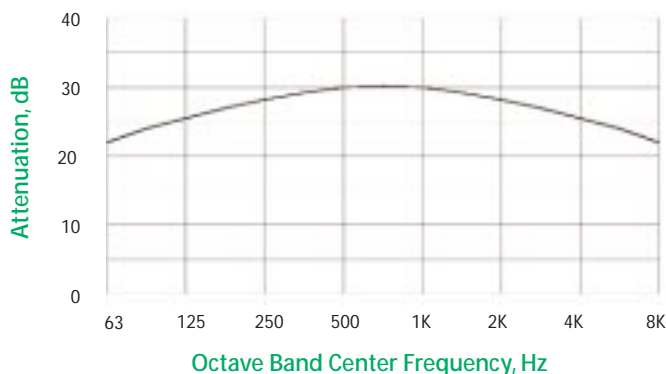


PRESSURE DROP

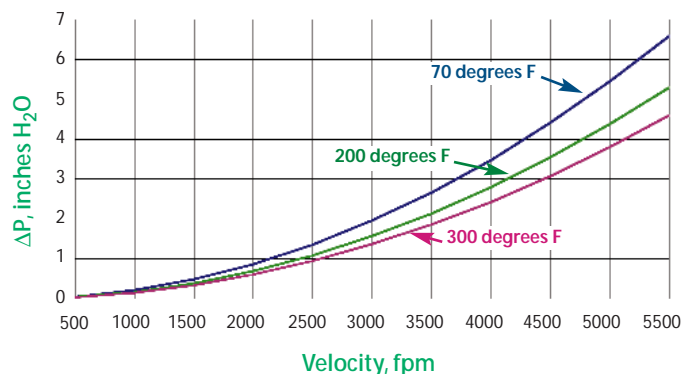

MODELS, DIMENSIONS & WEIGHTS

MODEL	P (nom.)	D	L	H	Y	K	WT.	CFM CAP
CB-2	2	8.00	11.00	8.00	4.00	7.00	15	120
CB-2.5	2.5	8.00	12.50	9.50	4.75	7.00	25	187
CB-3	3	12.00	13.50	10.50	5.25	9.00	35	270
CB-4	4	12.00	18.00	15.00	7.50	9.00	45	480
CB-5	5	16.00	20.00	17.00	8.50	11.00	70	750
CB-6	6	16.00	26.00	23.00	11.50	11.00	85	1080
CB-8	8	24.00	31.00	27.50	13.75	15.50	170	1920
CB-10	10	30.00	39.00	35.50	17.75	18.50	275	3000
CB-12	12	34.00	43.00	39.50	19.75	20.50	355	4320

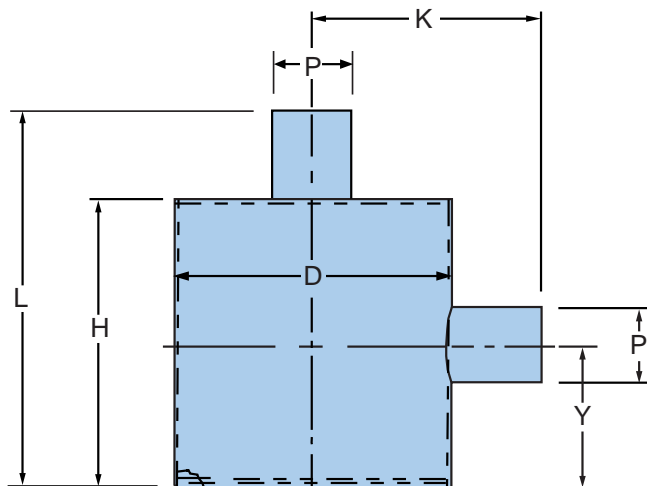

NOTES:
1. Finish: Shop coat primer (88-0102).



UNIVERSAL SILENCER

A FLEETGUARD/NELSON COMPANY

Northeast Controls Incorporated

P.O. Box 275 - Upper Saddle River, New Jersey 07458

Tel: 201-327-7660 | Fax: 201-327-3242 | sales@nciweb.net

Visit Us @ www.nciweb.net/universalsilencer.com